

05-5330-1414V1U

V0

NEU Wall fixture





Description

for indoor use.

For uplighting.. Structure material: Steel, Aluminium. Structure finish: White. Blades finishes: NA. Warranty: 5 Years.

Finish
White
NA

Material
Steel
Aluminium



TECHNICAL CHARACTERISTICS

Light source

Light source: LED
Output (W): 17.5W
Color temperature: LED warm-white
2700K
CRI: 93
Qty Leds: 1
Life Time: 50.000h L80B20
Bin / Grup: 27

GEAR

Gear included: Yes, electronic
Dimming protocol: 0-10V

Luminaire

Warranty: 5 Years

Logistics

Energy Efficiency: NA
EAN Code: 8435381471415
Net Weight (Lb): 1.92
Weight in Kg (packaged): 1.348
Packing: 255 x 235 x 130
Masterbox: 8

The photograph may not match the reference exactly. Please read the product description to identify the finish.

LEDS C4

Luminaire


Code 05-5330-1414V1U
Name Aplique led 13W 2700K

Measurerm.

Code 05-5330-14-14V1
Name Aplique led 13W 2700K

Luminaire Flux	1284.09 lm	Luminaire Power	17.50 W	Efficacy	73.38 lm/W	Efficiency	100.00%
Lamps Flux	1284.09 lm	Maximum value	374.14 cd/klm	Position	C=90.00 G=45.00	CG	Sym. on planes 270-90
Rectangular Luminaire Round Luminous Area	Length Diam.	105 mm 15 mm	Width Height	215 mm 0 mm	Height	215 mm	
Horizontal Luminous Area Emitting area on Plane 0° Emitting area on Plane 90°	0.000177 m2 0.000000 m2 0.000000 m2	Emitting area on Plane 180° Emitting area on Plane 270° Glare area at 76°	0.000000 m2 0.000000 m2 0.000043 m2				
Coordinate system Date Measurement Distance	CG Roads 19-02-2018 0.00	Symmetry Type Maximum Gamma Angle Measurement Flux	Sym. on planes 270-90 180 1284.09 lm				
Operator Temperature Humidity Notes	Asselum T2 25.00 °C 60.00 %	Source Voltage [V] Source current [A] Photocell					

Line	Code	Luminaire Lamps Name	Flux [lm]	Pow. [W]	Q.ty
	05-5330-1414V1U	05-5330-1414V1U	1284.09	17.50	1
C.I.E.	37 64 85 91 100	D DIN 5040	A21		

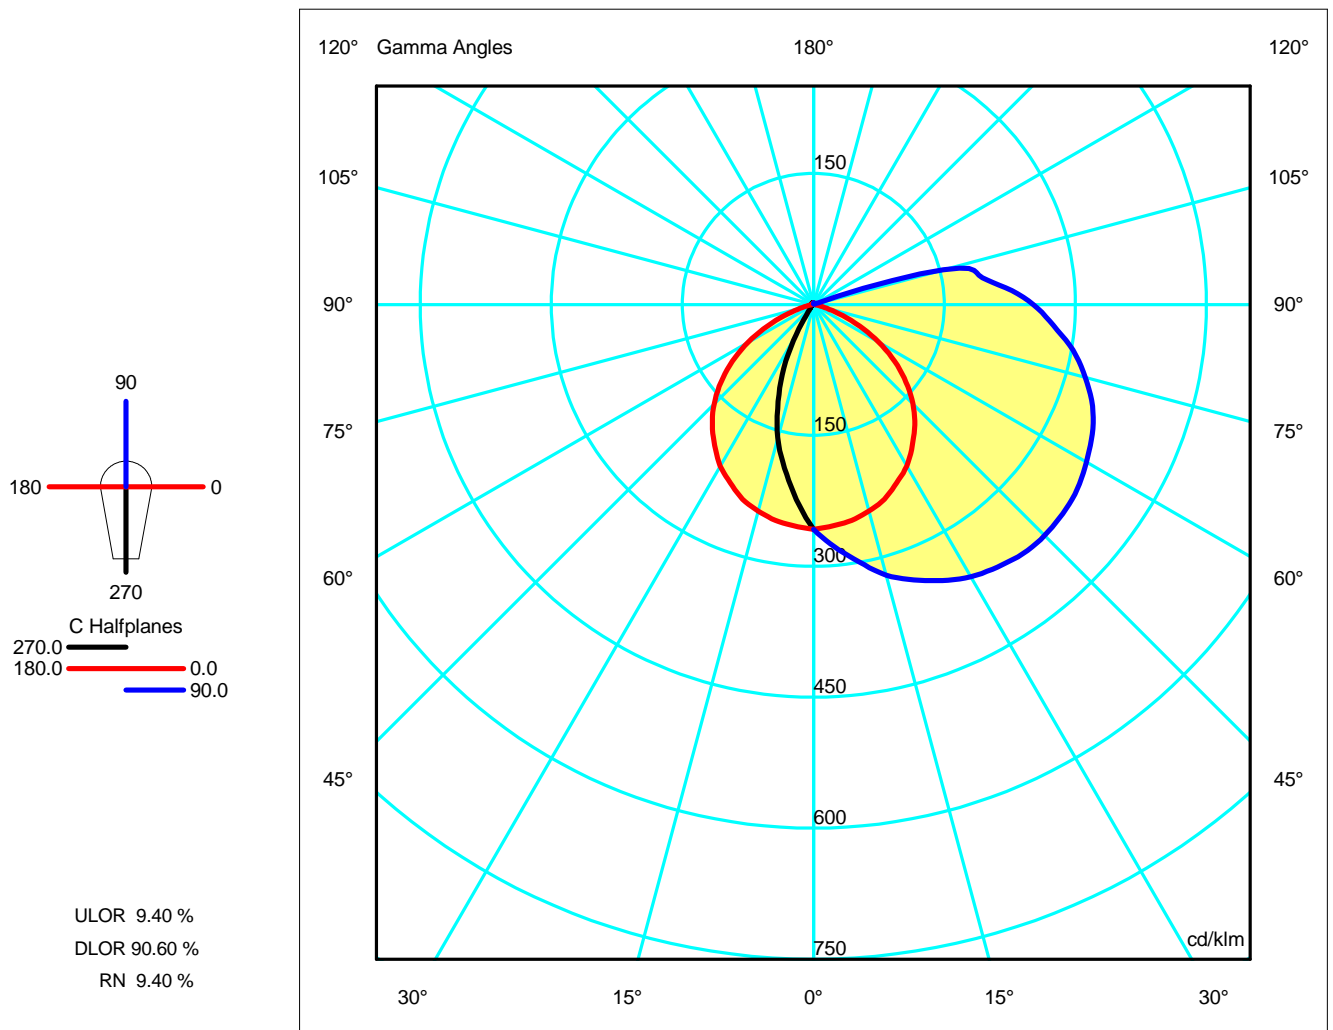

Luminaire

Code 05-5330-1414V1U
Name Aplique led 13W 2700K

Measurerm.

Code 05-5330-14-14V1
Name Aplique led 13W 2700K

Luminaire Flux	1284.09 lm	Luminaire Power	17.50 W	Efficacy	73.38 lm/W	Efficiency	100.00%
Lamps Flux	1284.09 lm	Maximum value	374.14 cd/klm	Position	C=90.00 G=45.00	CG Sym. on planes	270-90

Luminous Intensity Table cd/klm Table 1/1

	C 270.00	C 285.00	C 300.00	C 315.00	C 330.00	C 345.00	C 0.00	C 15.00	C 30.00	C 45.00	C 60.00	C 75.00	C 90.00
G 0.0	257.70	257.70	257.70	257.70	257.70	257.70	257.70	257.70	257.70	257.70	257.70	257.70	257.70
G 5.0	224.35	236.08	228.17	242.18	240.33	252.78	254.54	264.47	267.71	277.53	275.34	286.26	278.80
G 10.0	190.33	207.05	200.13	220.57	224.28	241.95	251.13	267.15	276.55	292.43	292.47	306.74	299.17
G 15.0	158.16	174.06	169.62	197.33	202.71	230.67	244.86	267.00	284.65	302.83	310.45	324.39	320.78
G 20.0	118.10	139.45	137.19	168.13	181.95	215.57	237.23	264.52	288.98	312.17	322.70	338.64	335.58
G 25.0	80.23	104.16	100.18	141.11	155.17	198.85	225.38	259.91	291.07	317.54	334.16	349.96	348.76
G 30.0	39.42	63.37	64.69	105.44	130.42	179.46	213.55	252.49	290.73	320.63	341.32	358.51	360.10
G 35.0	12.85	27.26	27.16	72.77	97.90	157.88	197.15	243.60	287.16	320.85	346.42	364.52	367.02
G 40.0	6.21	8.25	9.11	36.07	68.20	133.78	180.22	230.02	281.95	318.39	348.42	367.01	372.67
G 45.0	4.35	5.10	5.39	14.32	36.02	107.88	160.72	217.00	273.04	313.02	347.60	366.65	374.14
G 50.0	3.96	4.20	4.17	6.23	14.85	80.62	138.26	200.49	263.05	305.51	343.75	363.61	372.50
G 55.0	3.26	3.71	3.66	4.30	6.48	48.35	113.52	180.77	249.82	294.46	336.93	357.65	368.70
G 60.0	2.41	2.98	3.02	3.59	4.11	25.38	86.08	159.54	233.30	282.20	327.84	348.77	360.71
G 65.0	1.36	1.99	2.16	3.03	3.19	8.53	58.23	135.00	216.91	264.55	317.10	337.27	352.06
G 70.0	1.19	1.30	1.48	2.42	2.52	4.67	30.77	107.75	194.04	247.17	300.79	322.63	339.83
G 75.0	1.32	1.30	1.36	1.75	2.03	2.94	12.97	78.10	172.75	223.42	285.04	302.78	322.15
G 80.0	1.44	1.38	1.43	1.47	1.59	2.00	3.93	49.14	144.07	201.32	260.77	280.73	301.59
G 85.0	1.56	1.51	1.51	1.46	1.40	1.50	2.28	22.19	116.81	174.24	236.85	256.53	275.67
G 90.0	1.73	1.66	1.65	1.51	1.42	1.26	1.15	7.08	81.34	144.20	209.18	228.78	251.68
G 95.0	1.86	1.79	1.76	1.61	1.49	1.30	0.85	2.86	51.71	110.59	179.70	199.31	220.66
G100.0	1.98	1.89	1.86	1.69	1.57	1.38	0.93	1.90	23.12	73.59	145.98	165.95	192.35
G105.0	2.03	1.98	1.94	1.80	1.66	1.43	0.97	1.47	5.93	40.28	103.43	101.02	153.88
G110.0	2.13	2.09	2.06	1.86	1.73	1.53	1.05	1.13	2.52	4.21	1.76	0.77	5.37
G115.0	2.21	2.16	2.12	1.94	1.80	1.57	1.13	1.19	1.32	1.14	0.74	0.63	0.58
G120.0	2.25	2.24	2.17	2.02	1.86	1.66	1.17	1.26	1.13	0.91	0.77	0.65	0.62
G125.0	2.29	2.27	2.21	2.06	1.92	1.72	1.24	1.32	1.11	0.97	0.80	0.69	0.63
G130.0	2.33	2.29	2.23	2.10	1.96	1.77	1.32	1.40	1.17	1.05	0.85	0.75	0.70
G135.0	2.29	2.29	2.23	2.13	2.00	1.83	1.36	1.46	1.24	1.12	0.93	0.82	0.78
G140.0	2.29	2.29	2.23	2.16	2.04	1.88	1.44	1.53	1.32	1.19	1.01	0.91	0.85
G145.0	2.25	2.25	2.21	2.14	2.04	1.92	1.47	1.59	1.41	1.29	1.10	1.02	0.94
G150.0	2.21	2.21	2.19	2.13	2.04	1.92	1.53	1.65	1.49	1.38	1.20	1.14	1.07
G155.0	2.13	2.17	2.15	2.12	2.04	1.96	1.57	1.73	1.55	1.46	1.29	1.24	1.20
G160.0	2.09	2.13	2.09	2.11	2.04	1.98	1.63	1.78	1.65	1.53	1.40	1.34	1.32
G165.0	1.98	2.06	2.04	2.04	2.03	2.00	1.67	1.82	1.71	1.63	1.47	1.45	1.40
G170.0	1.94	1.98	1.96	2.00	2.00	2.00	1.73	1.89	1.80	1.72	1.60	1.56	1.51
G175.0	1.83	1.90	1.91	1.96	1.98	2.00	1.74	1.94	1.90	1.80	1.71	1.65	1.63
G180.0	1.87	1.87	1.87	1.87	1.87	1.87	1.87	1.87	1.87	1.87	1.87	1.87	1.87

LEDS C4[®]


Luminaire

Code 05-5330-1414V1U
 Name Aplique led 13W 2700K

Measurement

Code 05-5330-14-14V1
 Name Aplique led 13W 2700K

Luminaire Flux	1284.09 lm	Luminaire Power	17.50 W	Efficacy	73.38 lm/W	Efficiency	100.00%
Lamps Flux	1284.09 lm	Maximum value	374.14 cd/klm	Position	C=90.00 G=45.00	CG	Sym. on planes 270-90

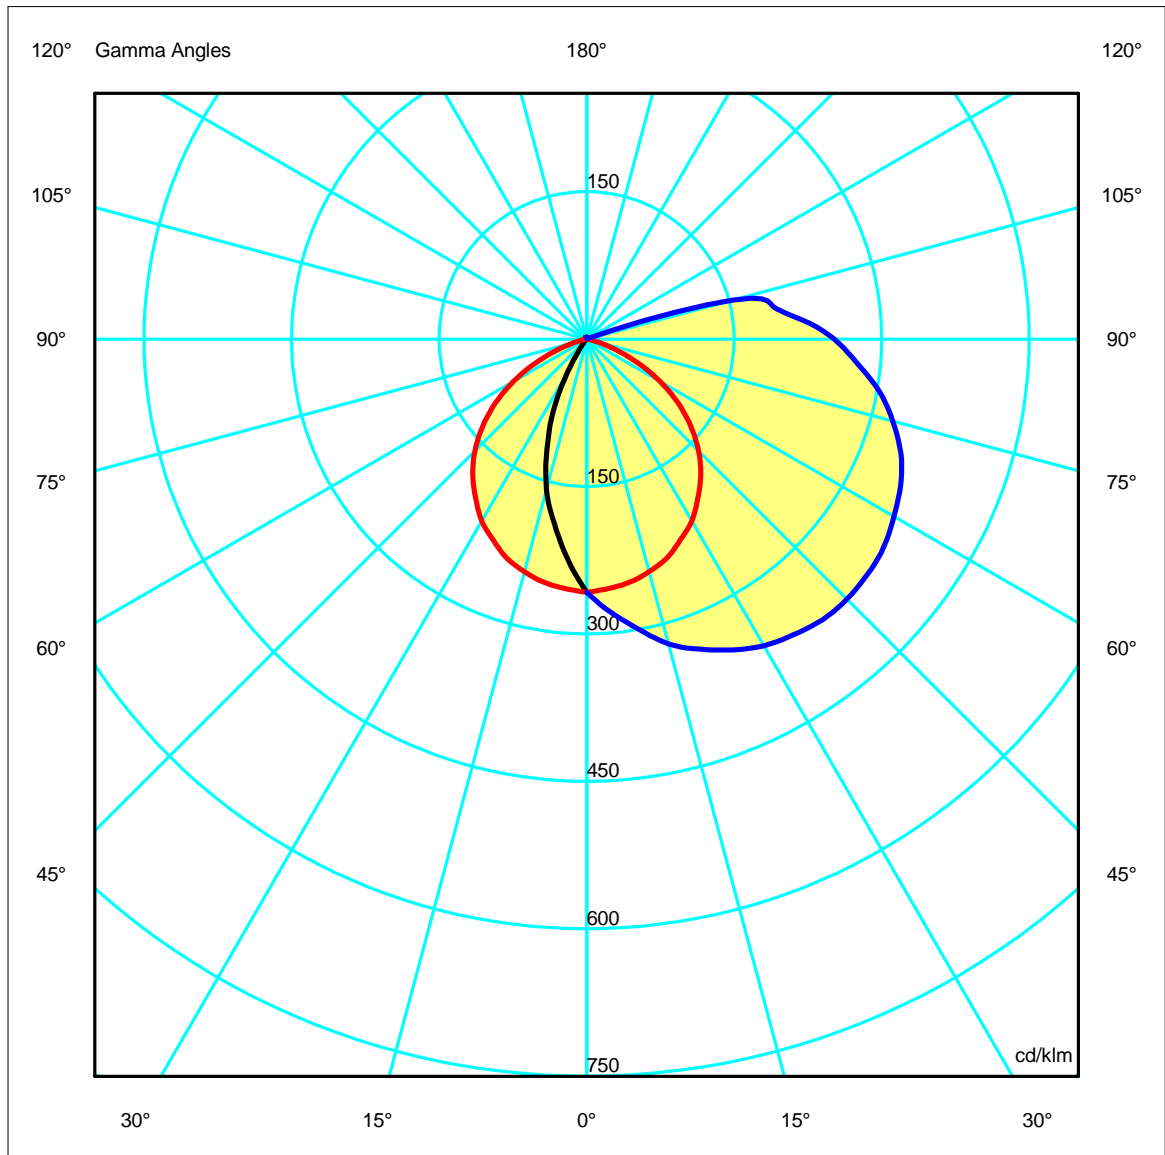

Luminaire

Code 05-5330-1414V1U
Name Aplique led 13W 2700K

Measurem.

Code 05-5330-14-14V1
Name Aplique led 13W 2700K

Luminaire Flux	1284.09 lm	Luminaire Power	17.50 W	Efficacy	73.38 lm/W	Efficiency	100.00%
Lamps Flux	1284.09 lm	Maximum value	374.14 cd/klm	Position	C=90.00 G=45.00	CG	Sym. on planes 270-90

Could not find 90270 right beam angle•gamma0180=0

Could not find 90270 right beam angle•gamma0180=0

Could not find 90270 right beam angle•gamma0180=0

Luminaire

Code 05-5330-1414V1U
Name Aplique led 13W 2700K

Measurement

Code 05-5330-14-14V1
Name Aplique led 13W 2700K

Luminaire Flux	1284.09 lm	Luminaire Power	17.50 W	Efficacy	73.38 lm/W	Efficiency	100.00%
Lamps Flux	1284.09 lm	Maximum value	374.14 cd/klm	Position	C=90.00 G=45.00	CG	Sym. on planes 270-90

UGR
S = 0.250

Reflectancies										
Ceiling/Cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
WorkingPlane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
RoomDimensions	Viewed Crosswise					Viewed Endwise				
x=2H y=2H	37.8	39.1	38.2	39.5	40.0	15.5	16.9	16.0	17.3	17.7
x=2H y=3H	38.9	40.2	39.4	40.6	41.1	15.7	16.9	16.2	17.4	17.9
x=2H y=4H	39.2	40.3	39.6	40.8	41.3	15.9	17.1	16.4	17.6	18.1
x=2H y=6H	39.2	40.3	39.7	40.8	41.3	16.5	17.6	17.0	18.1	18.6
x=2H y=8H	39.1	40.2	39.7	40.7	41.2	17.1	18.1	17.6	18.6	19.1
x=2H y=12H	39.1	40.1	39.6	40.6	41.2	17.9	18.9	18.4	19.4	20.0
x=4H y=2H	40.0	41.1	40.4	41.6	42.1	16.0	17.2	16.5	17.6	18.1
x=4H y=3H	41.7	42.8	42.3	43.3	43.8	16.3	17.3	16.8	17.8	18.4
x=4H y=4H	42.4	43.3	42.9	43.8	44.4	16.7	17.6	17.2	18.1	18.7
x=4H y=6H	42.7	43.5	43.3	44.0	44.7	17.5	18.3	18.1	18.8	19.5
x=4H y=8H	42.7	43.5	43.3	44.0	44.6	18.2	19.0	18.8	19.5	20.1
x=4H y=12H	42.7	43.4	43.3	44.0	44.6	19.2	19.9	19.8	20.5	21.2
x=8H y=4H	44.4	45.2	45.0	45.7	46.3	17.1	17.9	17.7	18.4	19.0
x=8H y=6H	45.3	46.0	45.9	46.6	47.2	18.2	18.8	18.8	19.4	20.1
x=8H y=8H	45.6	46.2	46.3	46.8	47.5	19.1	19.7	19.7	20.3	21.0
x=8H y=12H	45.7	46.2	46.4	46.9	47.6	20.4	20.9	21.0	21.5	22.2
x=12H y=4H	45.0	45.7	45.6	46.3	47.0	17.2	17.9	17.8	18.5	19.1
x=12H y=6H	46.3	46.9	46.9	47.5	48.2	18.4	19.0	19.0	19.6	20.3
x=12H y=8H	46.9	47.4	47.5	48.0	48.7	19.5	20.0	20.1	20.6	21.3

LEDS C4[®]




Luminaire

Code 05-5330-1414V1U
Name Applique led 13W 2700K

Measur.

Code 05-5330-14-14V1
Name Applique led 13W 2700K

Luminaire Flux	1284.09 lm	Luminaire Power	17.50 W	Efficacy	73.38 lm/W	Efficiency	100.00%
Lamps Flux	1284.09 lm	Maximum value	374.14 cd/klm	Position	C=90.00 G=45.00	CG	Sym. on planes 270-90

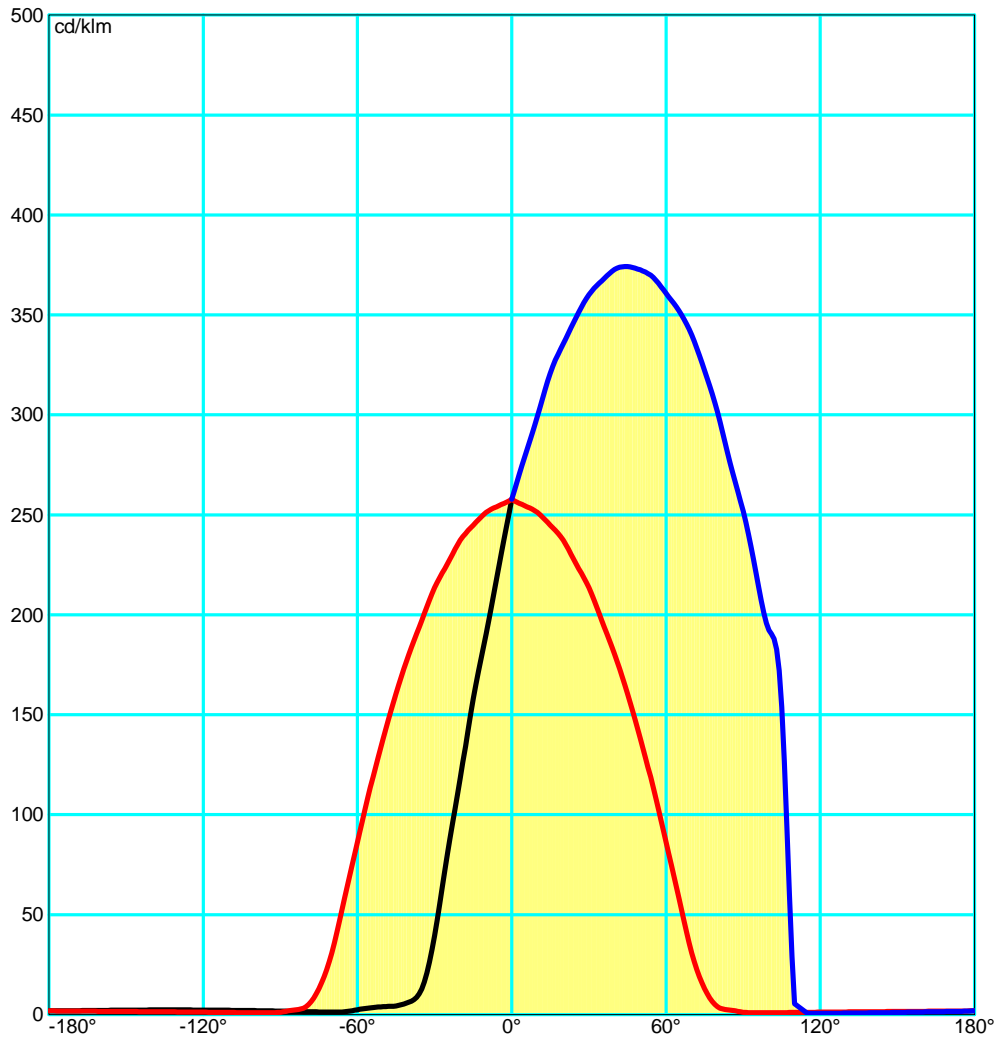

LEDS C4[®]

Luminaire

Code 05-5330-1414V1U
 Name Aplique led 13W 2700K

Measur.

Code 05-5330-14-14V1
 Name Aplique led 13W 2700K

Luminaire Flux	1284.09 lm	Luminaire Power	17.50 W	Efficacy	73.38 lm/W	Efficiency	100.00%
Lamps Flux	1284.09 lm	Maximum value	374.14 cd/klm	Position	C=90.00 G=45.00	CG	Sym. on planes 270-90

Luminance



Luminaire

Code 05-5330-1414V1U
Name Aplique led 13W 2700K

Measuram.

Code 05-5330-14-14V1
Name Aplique led 13W 2700K

Luminaire Flux	1284.09 lm	Luminaire Power	17.50 W	Efficacy	73.38 lm/W	Efficiency	100.00%
Lamps Flux	1284.09 lm	Maximum value	374.14 cd/klm	Position	C=90.00 G=45.00	CG Sym. on planes	270-90

Luminance cd/m2 Table 1/3

	C 0.00	C 10.00	C 20.00	C 30.00	C 40.00	C 50.00	C 60.00	C 70.00	C 80.00	C 90.00	C 100.00	C 110.00	C 120.00
G 0.0	1869528.18	1869528.18	1869528.18	1869528.18	1869528.18	1869528.18	1869528.18	1869528.18	1869528.18	1869528.18	1869528.18	1869528.18	1869528.18
G 5.0	1853672.20	1902580.03	1935387.42	1949571.39	2003620.48	2017346.13	2005176.52	2061378.08	2083142.20	2030362.68	2083142.20	2061378.08	2005176.52
G 10.0	1849966.01	1930312.10	1991858.71	2037245.78	2124484.30	2154303.27	2154502.41	2228911.23	2260775.75	2203860.96	2260775.75	2228911.23	2154502.41
G 15.0	1839038.72	1947520.49	2052943.50	2137877.21	2236251.87	2296127.77	2331648.62	2407639.87	2442296.96	2409246.04	2442296.96	2407639.87	2331648.62
G 20.0	1831512.20	1969566.13	2107603.81	2231033.81	2360224.87	2440995.56	2491390.51	2580844.10	2622879.83	2590785.17	2622879.83	2580844.10	2491390.51
G 25.0	1804099.29	1983275.86	2169555.96	2329919.11	2479616.96	2590751.03	2674878.95	2769056.36	2812006.62	2791726.50	2812006.62	2769056.36	2674878.95
G 30.0	1788901.40	2000451.57	2227234.29	2435427.89	2612497.78	2748635.84	2859272.89	2966208.84	3007686.61	3016564.90	3007686.61	2966208.84	2859272.89
G 35.0	1746070.93	2012844.96	2295304.01	2543202.50	2751439.74	2923268.79	3068002.05	3188717.61	3235722.72	3250463.04	3235722.72	3188717.61	3068002.05
G 40.0	1706748.97	2010521.44	2350696.42	2670200.21	2911810.01	3116274.31	3299644.44	3432559.51	3502997.65	3529309.93	3502997.65	3432559.51	3299644.44
G 45.0	1648992.41	2023603.51	2430063.87	2801306.46	3085335.39	3338265.87	3566323.00	3714965.03	3795001.66	3838617.43	3795001.66	3714965.03	3566323.00
G 50.0	1560404.79	2016360.53	2513502.38	2968877.51	3300862.57	3601002.17	3879659.67	4051042.47	4143960.01	4204226.07	4143960.01	4051042.47	3879659.67
G 55.0	1435856.52	1994791.11	2593382.95	3159738.66	3550970.46	3912445.68	4261527.48	4462820.75	4574677.90	4663402.52	4574677.90	4462820.75	4261527.48
G 60.0	1249009.53	1947757.18	2693490.58	3385037.68	3875082.85	4329666.68	4756839.00	4991180.13	5121301.63	5233770.34	5121301.63	4991180.13	4756839.00
G 65.0	999518.63	1840914.80	2821652.52	3723481.39	4283398.79	4851674.94	5443334.25	5717736.78	5866957.97	6043593.03	5866957.97	5717736.78	5443334.25
G 70.0	652649.19	1653875.42	2943161.64	4115849.17	4890998.59	5642425.25	6380193.90	6739129.46	6955490.41	7208389.11	6955490.41	6739129.46	6380193.90
G 75.0	363474.14	1395440.49	3117073.20	4842136.29	5812112.86	6852184.68	7989593.36	8400006.76	8625909.83	9029887.16	8625909.83	8400006.76	7989593.36
G 80.0	164280.25	1108273.56	3338468.07	6019033.07	7682527.64	9279790.60	10894729.19	11554051.09	11966864.54	12599837.52	11966864.54	11554051.09	10894729.19
G 85.0	189657.27	1294766.51	4182755.26	9722741.48	13058705.45	16301780.65	19715183.57	21045764.85	21781473.74	22946308.50	21781473.74	21045764.85	19715183.57
G 90.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

Luminaire

Code 05-5330-1414V1U
Name Aplique led 13W 2700K

Measuram.

Code 05-5330-14-14V1
Name Aplique led 13W 2700K

Luminaire Flux	1284.09 lm	Luminaire Power	17.50 W	Efficacy	73.38 lm/W	Efficiency	100.00%
Lamps Flux	1284.09 lm	Maximum value	374.14 cd/klm	Position	C=90.00 G=45.00	CG	Sym. on planes 270-90

Luminance cd/m2 Table 2/3

	C 130.00	C 140.00	C 150.00	C 160.00	C 170.00	C 180.00	C 190.00	C 200.00	C 210.00	C 220.00	C 230.00	C 240.00	C 250.00
G 0.0	1869528.18	1869528.18	1869528.18	1869528.18	1869528.18	1869528.18	1869528.18	1869528.18	1869528.18	1869528.18	1869528.18	1869528.18	1869528.18
G 5.0	2017346.13	2003620.48	1949571.39	1935387.42	1902580.03	1853672.20	1850593.19	1810466.73	1750159.64	1765800.65	1731238.76	1661606.04	1699493.66
G 10.0	2154303.27	2124484.30	2037245.78	1991858.71	1930312.10	1849966.01	1809644.85	1737109.86	1652226.39	1642749.89	1573986.25	1474286.29	1507606.14
G 15.0	2296127.77	2236251.87	2137877.21	2052943.50	1947520.49	1839038.72	1777921.37	1659421.39	1522475.73	1504381.71	1415534.58	1273940.00	1290518.50
G 20.0	2440995.56	2360224.87	2231033.81	2107603.81	1969566.13	1831512.20	1729583.77	1574695.64	1404719.50	1341168.85	1216530.50	1059124.61	1067137.51
G 25.0	2590751.03	2479616.96	2329919.11	2169555.96	1983275.86	1804099.29	1677385.34	1469880.65	1242103.46	1178573.17	1021218.24	801915.16	814992.96
G 30.0	2748635.84	2612497.78	2435427.89	2227234.29	2000451.57	1788901.40	1612768.58	1362772.71	1092540.37	959018.36	764544.19	541903.56	534529.96
G 35.0	2923268.79	2751439.74	2543202.50	2295304.01	2012844.96	1746070.93	1534608.75	1215957.16	867077.19	723098.27	508562.61	240578.78	241125.40
G 40.0	3116274.31	2911810.01	2670200.21	2350696.42	2010521.44	1706748.97	1435089.84	1057274.52	645901.41	423658.77	246493.14	86287.54	80819.21
G 45.0	3338265.87	3085335.39	2801306.46	2430063.87	2023603.51	1648992.41	1313484.81	850362.45	369532.64	179759.53	113080.09	55319.29	53350.31
G 50.0	3601002.17	3300862.57	2968877.51	2513502.38	2016360.53	1560404.79	1146620.21	635328.29	167591.81	102742.82	70112.09	47077.30	47304.68
G 55.0	3912445.68	3550970.46	3159738.66	2593382.95	1994791.11	1435856.52	872941.04	381898.65	81910.66	63583.75	59024.90	46270.51	46667.50
G 60.0	4329666.68	3875082.85	3385037.68	2693490.58	1947757.18	1249009.53	611642.64	203702.66	59675.51	54648.84	49345.72	43766.14	43406.01
G 65.0	4851674.94	4283398.79	3723481.39	2821652.52	1840914.80	999518.63	346485.89	115897.82	54813.88	52988.66	45360.08	37088.24	35218.31
G 70.0	5642425.25	4890998.59	4115849.17	2943161.64	1653875.42	652649.19	186687.53	83844.15	53478.11	52043.23	44763.75	31390.62	28885.69
G 75.0	6852184.68	5812112.86	4842136.29	3117073.20	1395440.49	363474.14	176130.85	73915.50	56828.12	50003.79	46095.61	38210.19	36009.23
G 80.0	9279790.60	7682527.64	6019033.07	3338468.07	1108273.56	164280.25	110434.84	77772.89	66294.41	63175.79	60996.49	59756.50	57876.07
G 85.0	16301780.65	13058705.45	9722741.48	4182755.26	1294766.51	189657.27	146619.45	109620.10	116639.30	120918.97	122494.90	125994.52	126041.13
G 90.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

Luminaire

Code 05-5330-1414V1U
Name Aplique led 13W 2700K

Measur.

Code 05-5330-14-14V1
Name Aplique led 13W 2700K

Luminaire Flux	1284.09 lm	Luminaire Power	17.50 W	Efficacy	73.38 lm/W	Efficiency	100.00%
Lamps Flux	1284.09 lm	Maximum value	374.14 cd/klm	Position	C=90.00 G=45.00	CG	Sym. on planes 270-90

Luminance cd/m2 Table 3/3


	C 260.00	C 270.00	C 280.00	C 290.00	C 300.00	C 310.00	C 320.00	C 330.00	C 340.00	C 350.00
G 0.0	1869528.18	1869528.18	1869528.18	1869528.18	1869528.18	1869528.18	1869528.18	1869528.18	1869528.18	1869528.18
G 5.0	1710306.63	1633845.09	1710306.63	1699493.66	1661606.04	1731238.76	1765800.65	1750159.64	1810466.73	1850593.19
G 10.0	1507964.68	1402070.68	1507964.68	1507606.14	1474286.29	1573986.25	1642749.89	1652226.39	1737109.86	1809644.85
G 15.0	1290693.45	1187861.54	1290693.45	1290518.50	1273940.00	1415534.58	1504381.71	1522475.73	1659421.39	1777921.37
G 20.0	1047842.87	911789.51	1047842.87	1067137.51	1059124.61	1216530.50	1341168.85	1404719.50	1574695.64	1729583.77
G 25.0	803702.70	642183.57	803702.70	814992.96	801915.16	1021218.24	1178573.17	1242103.46	1469880.65	1677385.34
G 30.0	492954.59	330204.48	492954.59	534529.96	541903.56	764544.19	959018.36	1092540.37	1362772.71	1612768.58
G 35.0	224348.86	113763.06	224348.86	241125.40	240578.78	508562.61	723098.27	867077.19	1215957.16	1534608.75
G 40.0	71672.04	58846.02	71672.04	80819.21	86287.54	246493.14	423658.77	645901.41	1057274.52	1435089.84
G 45.0	49775.74	44595.59	49775.74	53350.31	55319.29	113080.09	179759.53	369532.64	850362.45	1313484.81
G 50.0	46503.91	44674.99	46503.91	47304.68	47077.30	70112.09	102742.82	167591.81	635328.29	1146620.21
G 55.0	46509.39	41235.36	46509.39	46667.50	46270.51	59024.90	63583.75	81910.66	381898.85	872941.04
G 60.0	41744.22	34913.75	41744.22	43406.01	43766.14	49345.72	54648.84	59675.51	203702.66	611642.64
G 65.0	31565.11	23298.64	31565.11	35218.31	37088.24	45360.08	52988.66	54813.88	115897.82	346485.89
G 70.0	27224.38	25287.66	27224.38	28885.69	31390.62	44763.75	52043.23	53478.11	83844.15	186687.53
G 75.0	36610.02	36988.35	36610.02	36009.23	38210.19	46095.61	50003.79	56828.12	73915.50	176130.85
G 80.0	58327.08	60185.15	58327.08	57876.07	59756.50	60996.49	63175.79	66294.41	77772.89	110434.84
G 85.0	126834.13	130080.72	126834.13	126041.13	125994.52	122494.30	120918.97	116639.30	109620.10	146619.45
G 90.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

Luminaire
 Code 05-5330-1414V1U
 Name Aplique led 13W 2700K
Measurment.
 Code 05-5330-14-14V1
 Name Aplique led 13W 2700K

Luminaire Flux	1284.09 lm	Luminaire Power	17.50 W	Efficacy	73.38 lm/W	Efficiency	100.00%
Lamps Flux	1284.09 lm	Maximum value	374.14 cd/klm	Position	C=90.00 G=45.00	CG	Sym. on planes 270-90

PERCENTAGE ISOCANDLES

Projection: Equal Area SLI 6.7 Tight Tilting Angle:0°

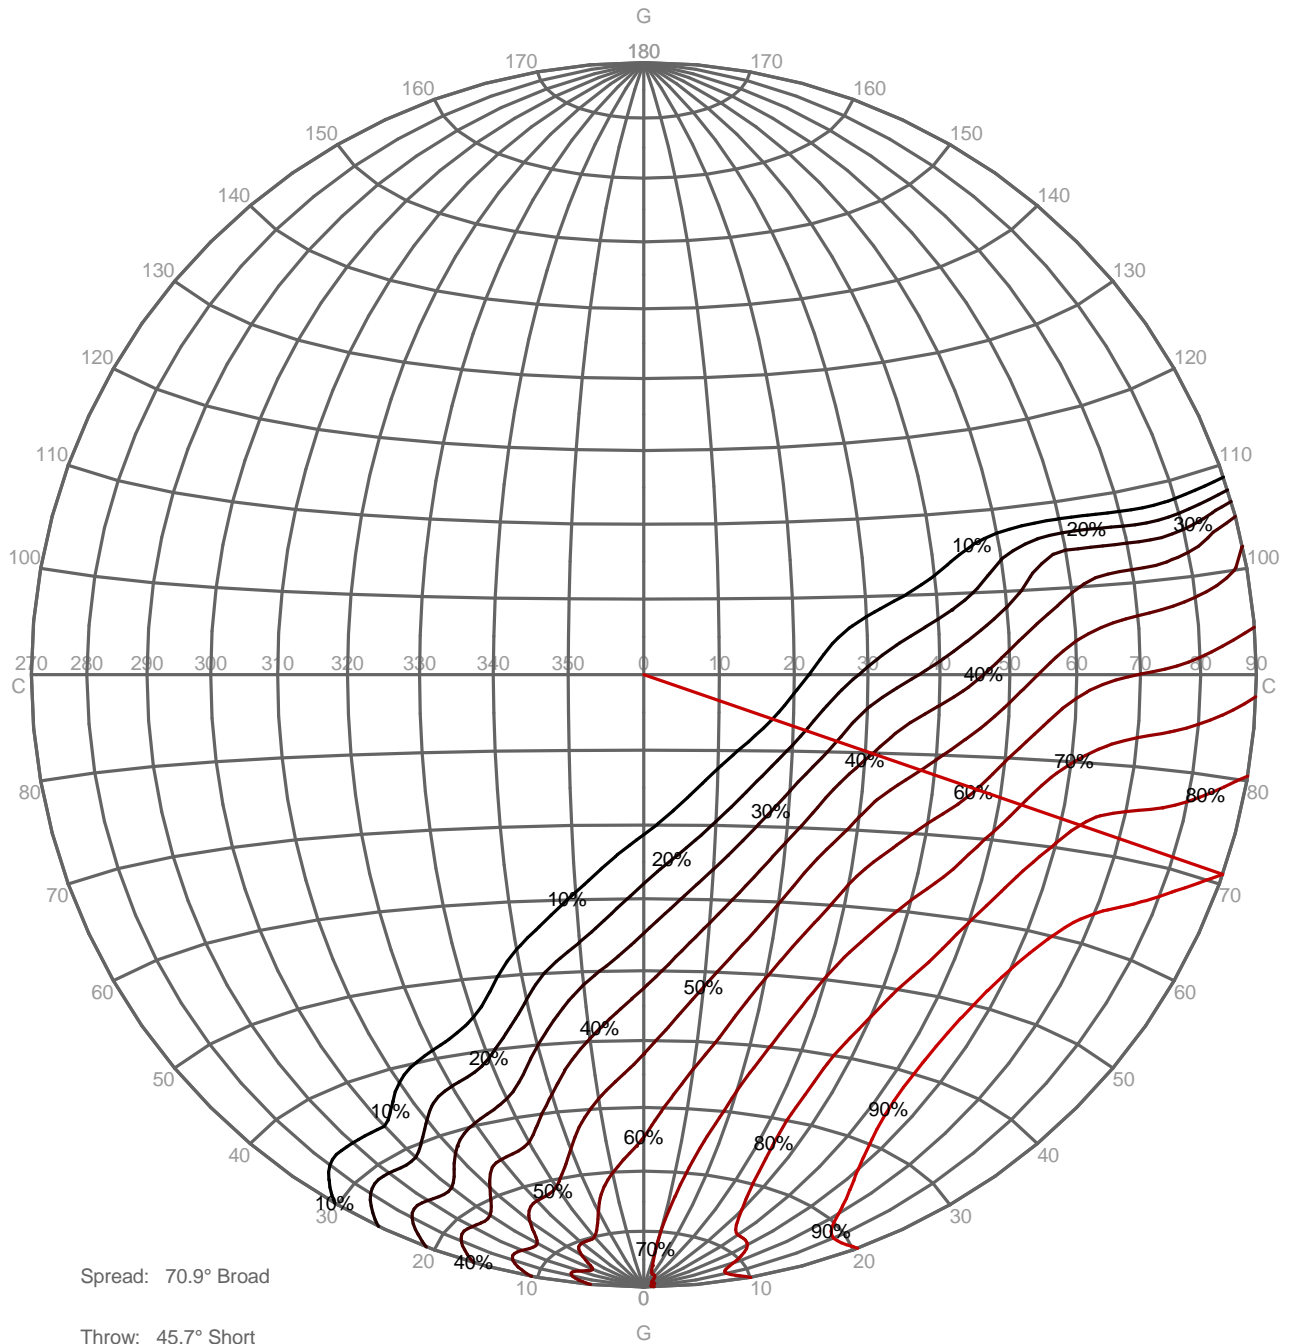

LEDS C4⁺

Luminaire

Code 05-5330-1414V1U
 Name Aplique led 13W 2700K


Measur.

Code 05-5330-14-14V1
 Name Aplique led 13W 2700K

Luminaire Flux	1284.09 lm	Luminaire Power	17.50 W	Efficacy	73.38 lm/W	Efficiency	100.00%
Lamps Flux	1284.09 lm	Maximum value	374.14 cd/klm	Position	C=90.00 G=45.00	CG	Sym. on planes 270-90

Isolux (Floor)

Luminaire position X=0.00m Y=0.00m Z=2.50m

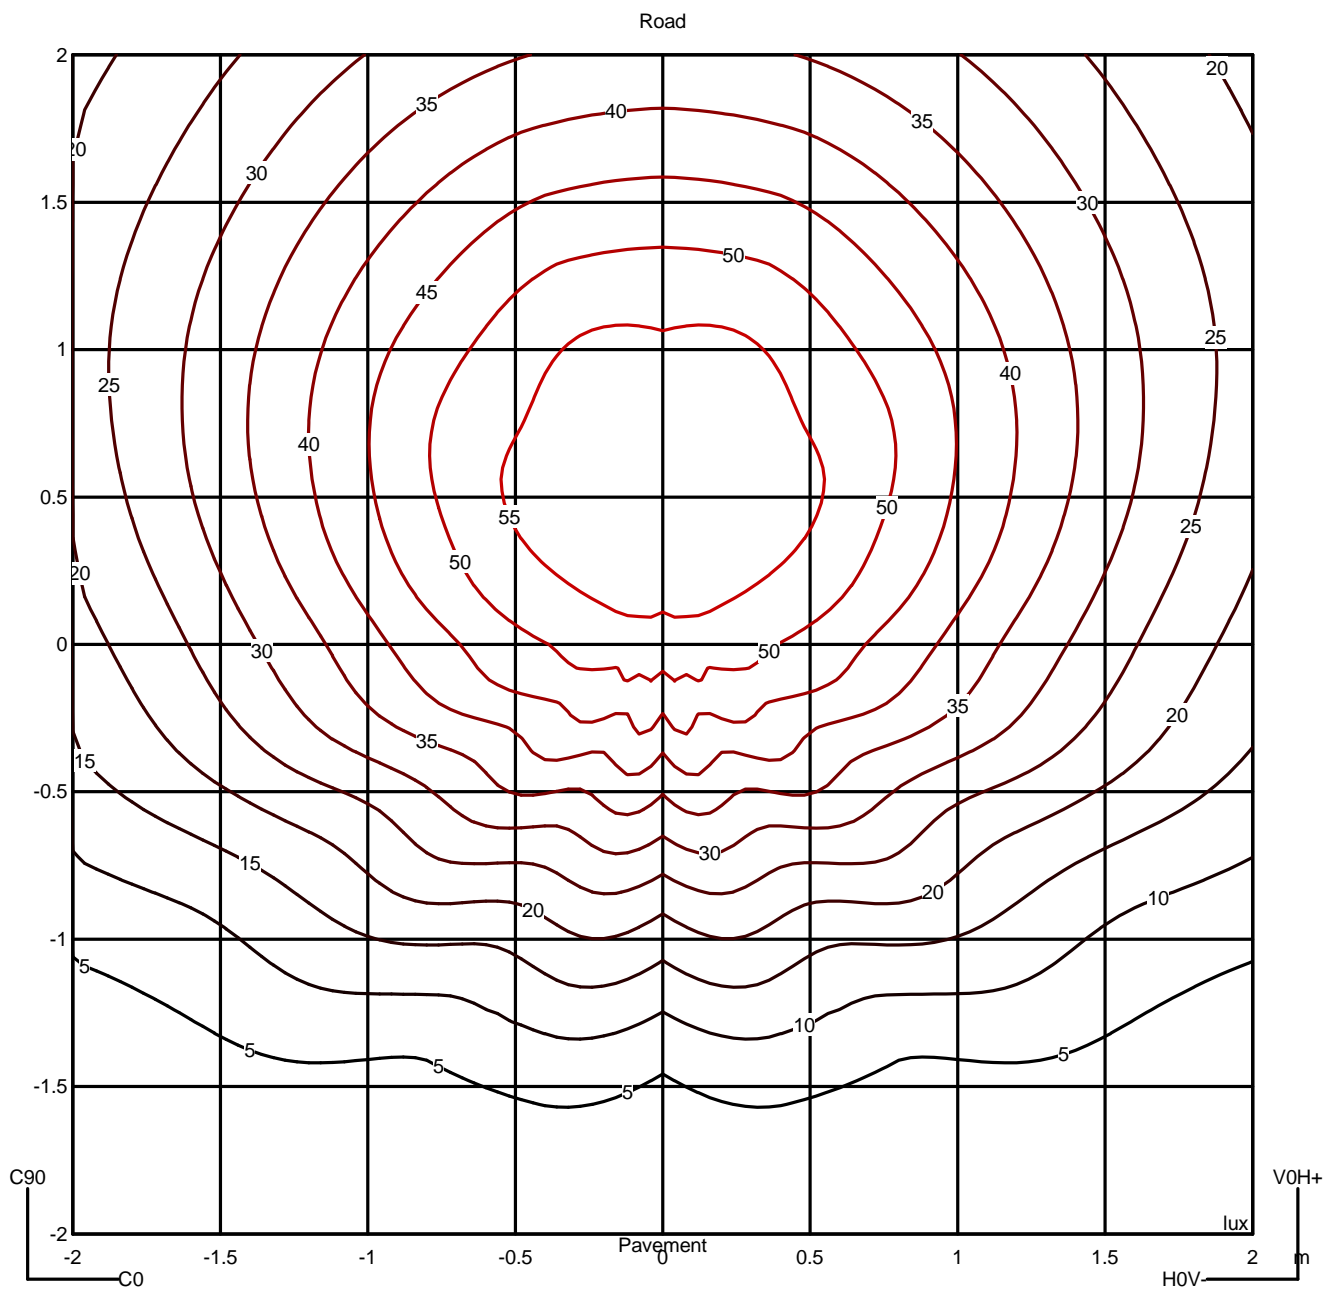

LEDS C4[®]

Luminaire

Code 05-5330-1414V1U
 Name Aplique led 13W 2700K

Measur.

Code 05-5330-14-14V1
 Name Aplique led 13W 2700K

Luminaire Flux	1284.09 lm	Luminaire Power	17.50 W	Efficacy	73.38 lm/W	Efficiency	100.00%
Lamps Flux	1284.09 lm	Maximum value	374.14 cd/klm	Position	C=90.00 G=45.00	CG	Sym. on planes 270-90

		Average Luminance [cd/m ²]											
		45°	50°	55°	60°	65°	70°	75°	80°	85°			
0.0°	1648992	1560405	1435857	1249010	999519	652649	363474	164280	189657	---			
90.0°	3838617	4204226	4663403	5233770	6043593	7208389	9029887	12599838	22946309	---			

Flush mounted or longitudinal view												
		Illumination(lx)										
A	A	2000	1000	750	500		<300					1.15
B	1		2000	1500	1000	750	500	<300				1.5
C					2000		1000	500	<300			1.85
D	2						2000	1000	500	<300		2.2
E	3							2000	1000	500	<300	2.55

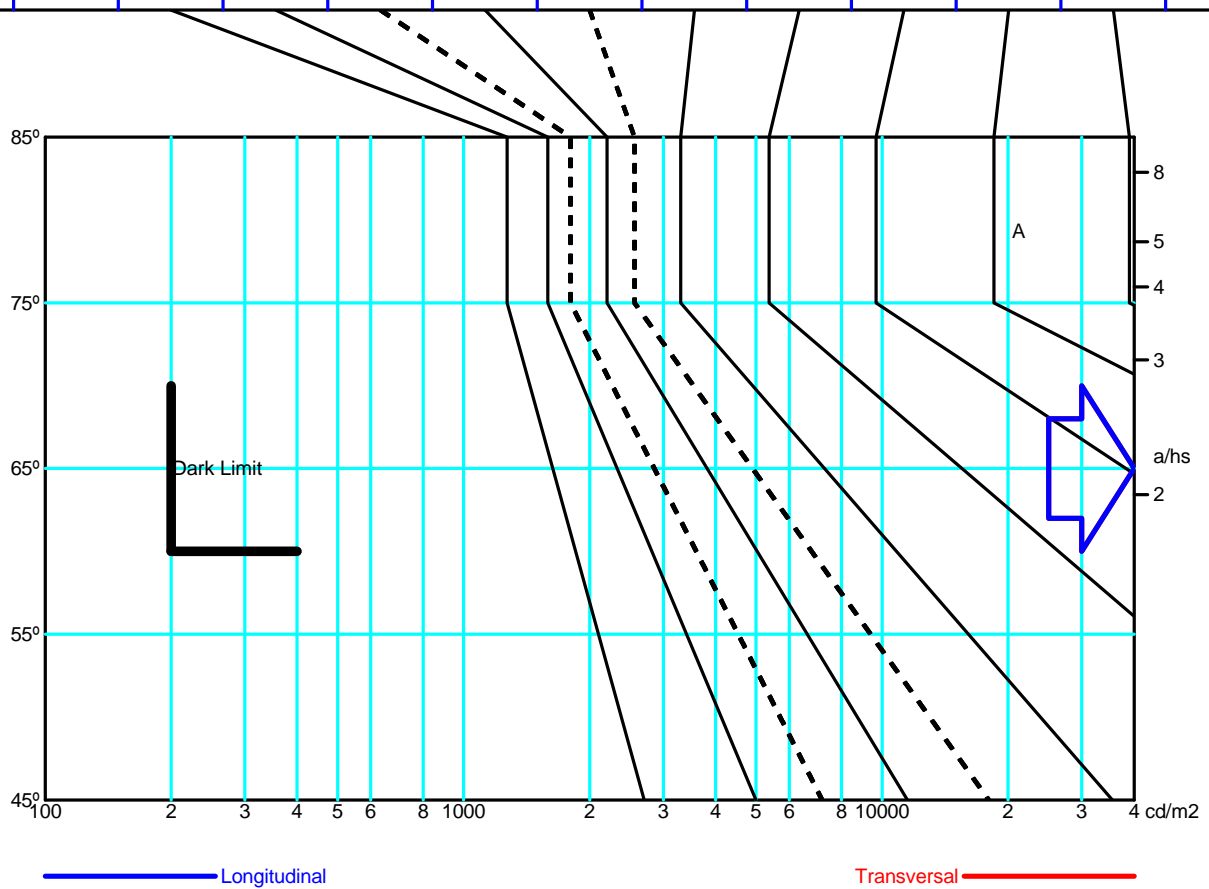


FIGURE N° 1. UNPACK THE FIXTURE: CHECK THE CONTENTS OF THE BOX. YOU SHOULD RECEIVE:

FIGURE N° 1. DÉBALLER LE PLAFONIER: VÉRIFIER LE CONTENU DU CARTON, VOUS DEVEZ RECEVOIR:





FIGURE 6


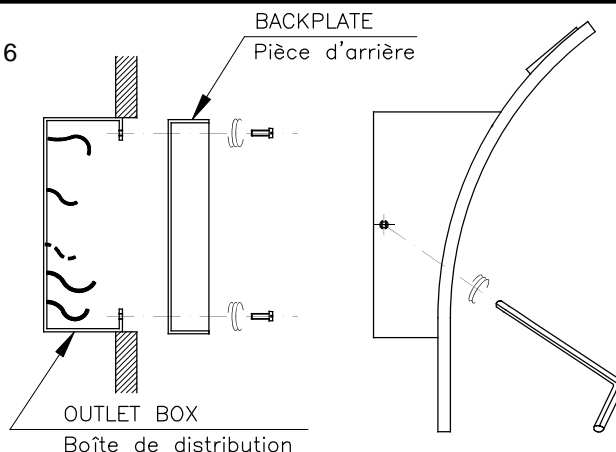


FIGURE 7


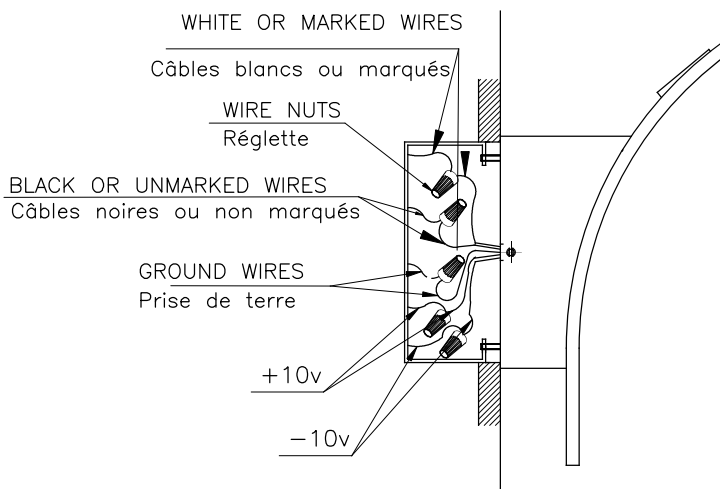


INSTALLATION INSTRUCTIONS FOR HANGING FIXTURES

INSTRUCTIONS D'INSTALLATION POUR PLAFONNIERS

FIGURE 3, 4 AND 5 MOUNTING HARDWARE.
NOTE: TEST THE CONNECTOR BY GENTLY PULLING IT. IF IT PULLS OUT THE CONNECTION, TRY AGAIN TILL YOU HAVE A FIRM CONNECTION. MAKE SURE NO BARE STRANDS OF WIRE STICK OUT FROM UNDER THE CONNECTORS.

FIGURE 3, 4 ET 5 MONTAGE DE L'ÉQUIPE.
IMPORTANT: ESSAYER DE TIRER LE CÂBLE D'ALIMENTATION DOUCEMENT. S'IL SORT DE LA CONNEXION, IL FAUDRAIT ASSURER QUE LA CONNEXION SOIT FERME. S'ASSURER QUE LES FILS DES CÂBLES NE SONT PAS À DÉCOUVERT DU CONNECTEUR.

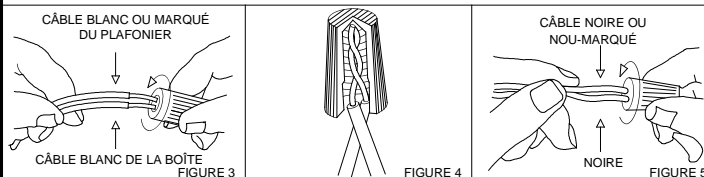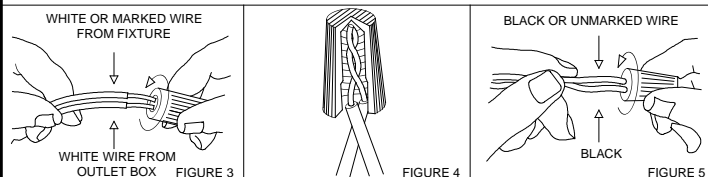

CAUTION:
"Warning", "This product is to be installed by a qualified electrician only."
"Suitable for dry locations only"

ATTENTION:
"Attention", le raccordement électrique sera effectué par un technicien électrique qualifié
"Adéquat seulement en lieux secs."

CAUTION:
1.- Wrong lighting installation can be dangerous for your safety.
2.- Before starting, disconnect the power by turning off the general switch of the electric installation.
3.- Install light bulbs (not provided) that must not exceed markings on the fixture.
4.- To change the bulbs, disconnect the power by turning off the general switch and wait for the bulbs cool down.
INSTALLATION:
1.- Make electrical connections, carefully read the Electrical Connection section.
2.- Assemble lighting onto the outlet box as shown on fig. 6, & 7.
ELECTRICAL CONNECTIONS: (See fig. 3,4 y 5)
1.- Connect the white wire from the fixture to the white wire of the electric installation.
2.- Connect the black wire from the fixture to the black wire of the electric installation.
3.- Connect the grounding conductor from the fixture to the grounding wire of the electric installation.
4.- Spread out the electrical wires so that the black ones are on one side of the outlet box and the white ones are on the other side, and carefully introduce them into the outlet box.

ATTENTION:
1. Une mauvaise installation peut compromettre votre sécurité.
2. Déconnecter la tension du réseau d'alimentation avant de réaliser toute opération.
3. Installer les ampoules (non fournies), ne pas utiliser d'ampoules d'un autre type ou d'une puissance supérieure à celle indiquée sur l'étiquette de la lampe.
4. Pour changer les ampoules, déconnecter la tension du réseau d'alimentation et laisser refroidir les ampoules.
INSTALLATION:
1. Connecter au réseau, lire attentivement la section de "Raccordements électriques"
2. Installer l'appareil à la boîte de distribution comme indiqué dans les dessins 6 et 7.
RACCORDEMENTS ÉLECTRIQUES (dessins 3,4 et 5)
1. Connecter le câble blanc de l'appareil au câble blanc de l'installation électrique.
2. Connecter le câble noir de l'appareil au câble noir de l'installation électrique.
3. Connecter le câble conducteur de prise de terre au câble de prise de terre de l'installation électrique.
4. Distribuer les câbles pour que tout le câblage noir soit par dehors et le câblage blanc soit par dedans. Ajuster et immobiliser à la boîte sans coincer aucun câble.